







TECHNICAL DATA SHEET OF 2-LAYER PARQUET

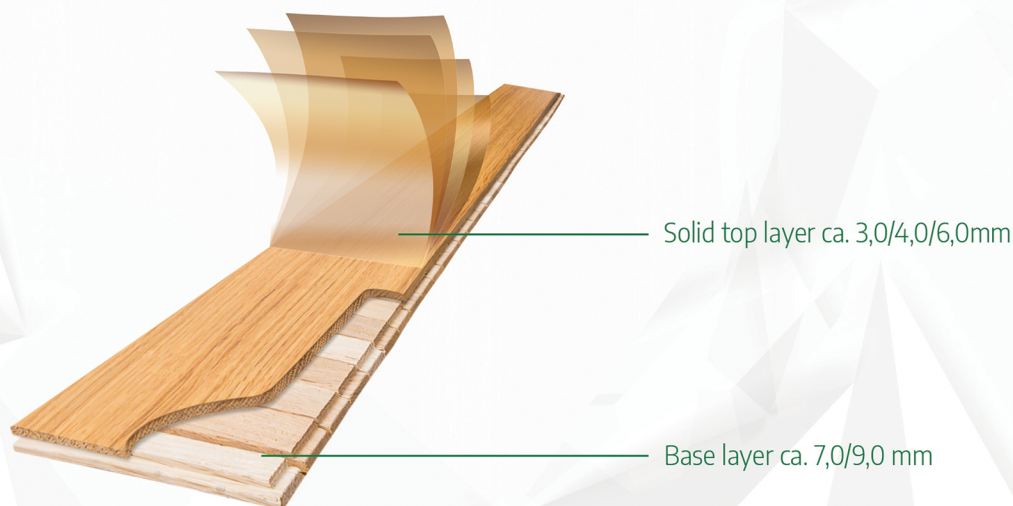

Produced according to	DIN EN 14342 2009					
Wood species	Different, according to offer					
Finishing	Varnish UV					5-layers
	Oxidative Oil					pre-oiled
	Waxoil					2-layers
	Unfinished					
Moisture content	7%					Tolerance +/- 2%
						
Length of top layer	350, 490	500, 600, 665	1000, 1200, 1330	2200	590, 600, 900, 500, 850	Tolerance +/- 0,1%
Width of top layer	70	100, 120, 150	100, 120, 150	180	70, 100, 100, 150, 150	Tolerance 0,2mm
Height differences between elements	Max. 0,2mm					
Squareness deviation	Max. 0,2%					Concerns width of top layer
Strightness of top layer	Max 1%					Concerns length of top layer
Floor heating system	Yes					
Bottom layer	Oak, pine, plywood					
CE- sign	Available					
Bonding layers	PUR glue or HM PUR glue, PVAC glue D3					without formaldehyde
Formaldehyde emission	E1 (<0,1ppm) harmless No emmition					tested
PCP	No detectably, harmless					tested
Reaction to fire	DFSL / CFSL					partial